1. Handling

Unit Volume / Weight

Unit Ref : VR8-610
Volume : 0.156 m³
Weight : 370 kg

- Weight is based on 2,350 kg/m³
- Lifting system is by means of a 16mm dia. inverted 'V' hook using lifting chains or similar certified lifting system. Hook certified to : (LOLER 1998), (PUWER) 1998
 (The spherical pin anchor is used for production purposes only).

IMPORTANT NOTE:

Prior to lifting older / pre-used blocks, check the lifting pin for wear / corrosion and check the block for cracks. If the block is cracked or the pin is worn, it could fail when lifting.

2. Concrete

- Characteristic 28 day cube strength = 50 N/mm² min.
- Concrete is Class A1 Fire Resistant in accordance with clause 4.3.4.4 of EN 13369

3. Manufacture

Manufactured to: BS EN 13369: 2013
 Tolerances to: BS EN 13670: 2009

4. Physical & Chemical Properties

Appearance : Grey in Colour


Other Chemical Properties : Not Applicable


5. Design

Design Life: >100 years

6. Manufacture Tolerances

Length ±5mm
 Width ±5mm
 Height ±5mm

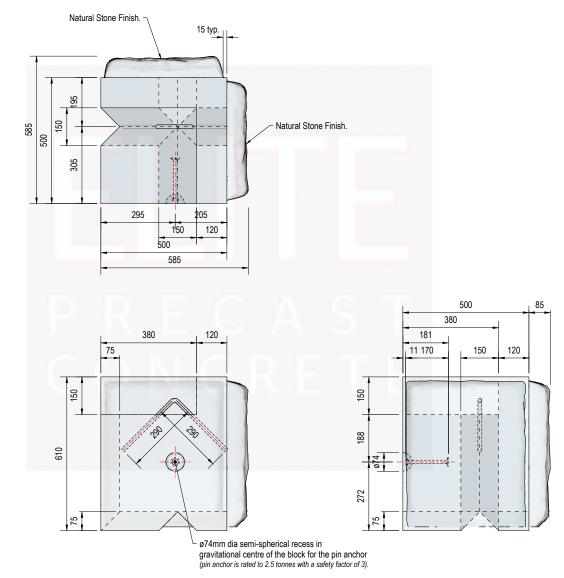

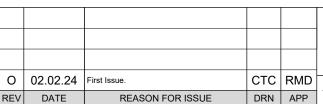

Vee-Rock™ Interlocking Concrete Block
585mm x 585mm x 610mm Natural Stone Faced (notched)
Elite Product Code: **VR8-610**

ELITE PRECAST CONCRETE LTD HALESFIELD 9, TELFORD SHROPSHIRE TF7 4QW

ELITE PRECAST CONCRETE

www.eliteprecast.co.uk

DRN CTC CHKD RMD DATE 02-02-24 SIZE A4 SCALE 1:15 DRG EPC-VRK-008

REV