Max. Permissible Impact Loads

<--- 0.9mph

< 1.5mph

Allowable impact load speed based on:-


Vehicle (Maximum operating weight 20t)

- 100mm NOTE:-Impact loads are the expected loads imposed on the wall by loading shovels, backhoes, buckets etc. carrying out NORMAL procedures of loading and unloading bays.

Total allowable deflection

NOTE:-

Wall has **not** been designed for retained material to be compacted by vehicle driving over or on top of the retained material

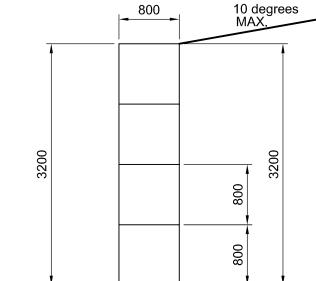

Retained Material:-Lightweight Recyclables up to 3.2m high and sloped at a maximum of 10 degrees.


AoR = 30 degrees **Maximum Density** 9 kN/m3 (900 kgs/m3)

It is up to the client to advise if these parameters are not correct.

Design Parameters (1:50)

NOTE:-

The bearing pressure beneath the wall is shown below. It is up to the client to ensure the ground and slab is adequate, alternatively a foundation may be designed to suit allowable ground bearing pressures

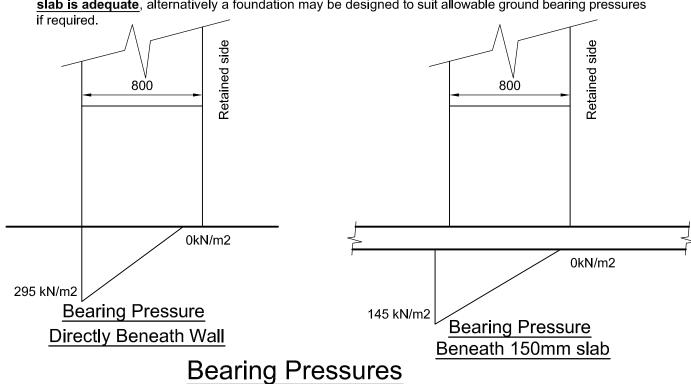


(1.25)

NOTES:-

- 1. The contractor should take all necessary measurements on site.
- 2. All dimensions shown on this drawing are approximate and for structural calculation purposes only
- 3. Dimensions on this drawing should not be used for fabrication purposes.
- 4. Do not scale this drawing.
- 5. This drawing should be read in conjunction with the calculations.

IMPORTANT NOTE

The existing slab and ground have not been investigated by CLP structures, the pressures exerted on the ground and slab are shown on this drawing, however it is up to the client to satisfy himself that the existing ground and slab are adequate to support these loads.

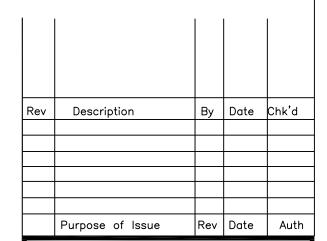



EMAIL: mail@CLP-Structures.co.uk TEL: 0117 3706357

Client

Elite Precast Concrete Ltd.

Lightweight Recyclables 3.2m High Legato

Title

Wall Design Parameters and Limitations

Original Scale Rev - Checked Date April 16 Drawing Number

464-CL04