



Weight: 330kg Approx.

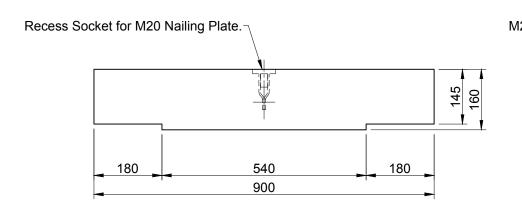

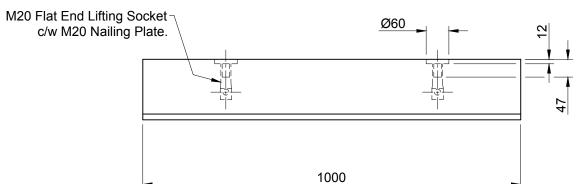

- 50N/mm² Concrete.
- Lids reinforced with 16mm bar at 100mm centres.
- Tested to BS EN 124 Class B125 (group 2) Designed to Class C250 (group 3).
- No problem with modifying units on site; for example drilling and fixing brackets, core drilling to take plastic pipes, cutting and re-casting for corners and flat ends.
- 3mm neoprene recommended as a gasket between lid and channels in heavily trafficked areas.

										TITLE	
					0	21.04.16	For Information.	СТС	RMD	A	
REV	DATE	REASON FOR ISSUE	DRN	APP	REV	DATE	REASON FOR ISSUE	DRN	APP	 () 	

Channel Lid 1	000 x 920	X 100	ELITE PRECAST CONCRETE LT HALESFIELD 9, TELFORD			
Elite Product Code	: 1601		SHROP	SHIRE TF7 4Q	W	